

WOW III

Channel Letter Solution

WOW III Module, the new generation of WOW Series Module, bring this market-favored products to the next level, greatly enhancing the efficiency to 200lm/w while retaining the beloved design!


Specification Chart

Product Options	White (7500K/6300K/5000K/2700K)
Input Voltage	12VDC
Beam Angle	172°
Power consumption (watts)	1.2w/mod
LED / module	3
Modules / foot	1.3/ft. fully stretched
Protection Grade	IP67
Operating Temp	-40° ~ +60 °C / -40° ~ +140 °F
Storage Temp	-40° ~ -70 °C / -40° ~ +158 °F
Cascade	25 mods single-ended power feed , 50 mods double-ended power feed
Packaging	25pcs/chain, 50pcs/bag, 10 bags/outer carton

Options

Model	Voltage	Color Temp	Lumens
WOW III 7500k	12V	7500K	243.6lm/mod(203lm/W)
WOW III 6300k	12V	6300K	233.86lm/194.88mod(lm/W)
WOW III 5000k	12V	4200K	228.9lm/mod(190.75lm/W)
WOW III 2700k	12V	2700K	221.68lm/mod(184.73lm/W)

Dimensions

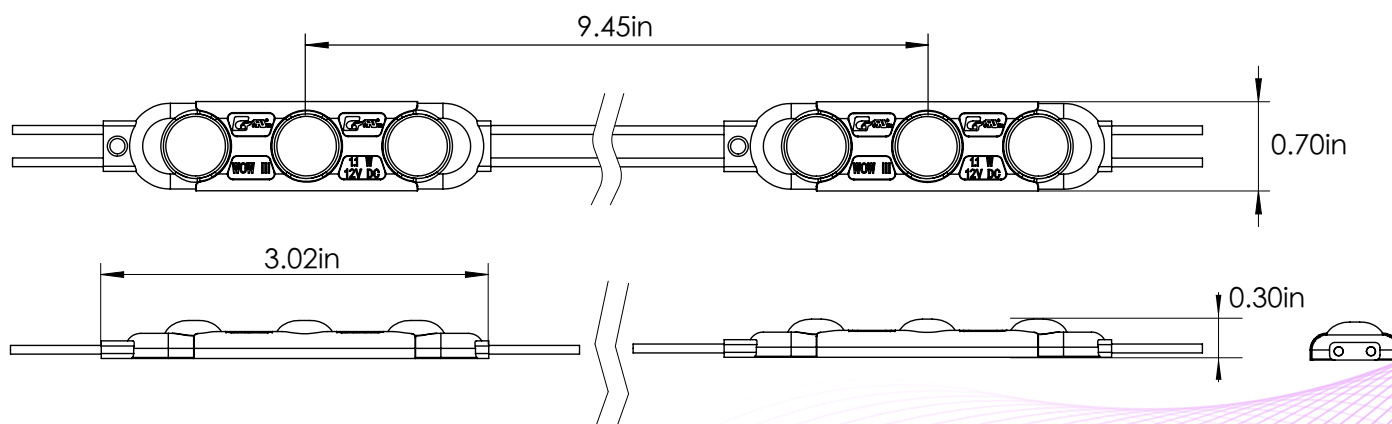

200lm/w



3"-12" Depth Min



7+5-Year Warranty



12VDC



L80 rating of
50,000 hours



UV Resistant



High Efficiency

- UV and IR Protected
- L80 rating of 50,000 hours
- Designed for medium to large Channel letters

Modules Population Guide

Channel Letter Depth (in)	Multiple Rows (rows spacing)	Clearance	Mods per Ft
3"	4"	2"	1.5
4"	7"	3"	1.5
5" - 6"	10"	5"	1.3
7" - 10"	12"	6"	1.3