

WOW II ECO

Channel Letter Solution

New ECONOMIC generation of WOW II modules, boasts of high efficiency at 165lm/w, which can achieve light output up to 165 lumens per module.

Specification Chart


Product Options	Red/Green/Blue/Orange
Input Voltage	12VDC
Beam Angle	172°
Power consumption (watts)	0.72W/mod, 1.08W/ft
LED / module	2
Model	HHLED Series
Modules / foot	1.5Mods/ft. fully stretched
Protection Grade	IP67
Operating Temp	-40°~ +60 °C / -40° ~ +140 °F
Storage Temp	-40°~ -70 °C / -40° ~ +158 °F
Cascade	25 mods single-ended power feed , 50 mods double-ended power feed
Packaging	40pcs/chain, 80pcs/bag, 10 bags/outer carton

Options

Model	Color Temp	Lumens
WOW II ECO Red	Red	25.7lm/mod(38.6lm/ft)
WOW II ECO Green	Green	69.5lm/mod(104.3lm/ft)
WOW II ECO Blue	Blue	13.3lm/mod(20.0lm/ft)
WOW II ECO Orange	Orange	11.86lm/mod (17.79lm/ft)

Additional color temps available upon special order (MOQs Apply)

Dimension

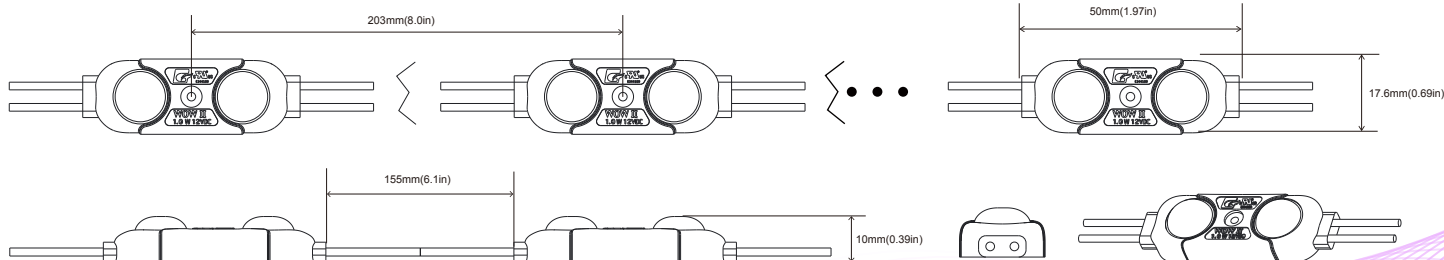

3"-12" Depth Min



7+5-Year Warranty



12VDC



L80 rating of
50,000 hours



UV Resistant



High Efficiency

Benefits

- UV and IR Protected
- L80 rating of 50,000 hours
- Designed for medium to large Channel letters
- 3M double face tape and mechanical mounting options.

Modules Population Guide

Channel Letter Depth (in)	Multiple Rows (rows spacing)	Clearance	Mods per Ft
3"	4"	2"	2
4"	6"	3"	1.5
5"- 6"	10"	5"	1.5
7"- 10"	12"	5"	1.5