

Gfp 300 Series

Top Heat Laminators

Fully featured, professional quality, affordably priced.



Sign shops and digital printers now have an affordable option for pressure-sensitive applications. The **Gfp 300 Series** laminators deliver labor-saving features, rugged construction and high quality output in an entry level machine. Building off of the 255C Cold Laminator, the **300 Series** adds **top heat** for better overlamination, mounting and board coating results. To make production easier and more efficient, they feature new 3" aluminum tube **Quick-grip film shafts** with width measurements for easy loading and alignment, **Integrated Top Liner and Rear Output Rewinds** for roll-to-roll applications, and new **Metal Alloy Tubular Heaters** to reduce breakage.


- √ Roller diameter 5"
- √ 55" and 63" widths
- √ Speed and temperature controls
- √ Foot pedal
- √ 2 Unwind supply shafts
- √ Top and rear take-up mandrels
- √ Swing up feed table
- √ Integrated top liner rewind
- √ Integrated rear rewind

- √ Variable roller gap to 1"
- √ Metal Alloy heater
- √ 3" Aluminum Quick-Grip shafts
- √ Chain drive rewinds
- √ Single pressure adjustment
- √ Machine stand with casters
- √ 38" table height output
- √ 120 volt service
- √ cTUVus safety approved



The Profitable Source for Finishing Products

Choose the 300 Series Top Heat Laminators for *Overlamination Mounting Board pre-coating*

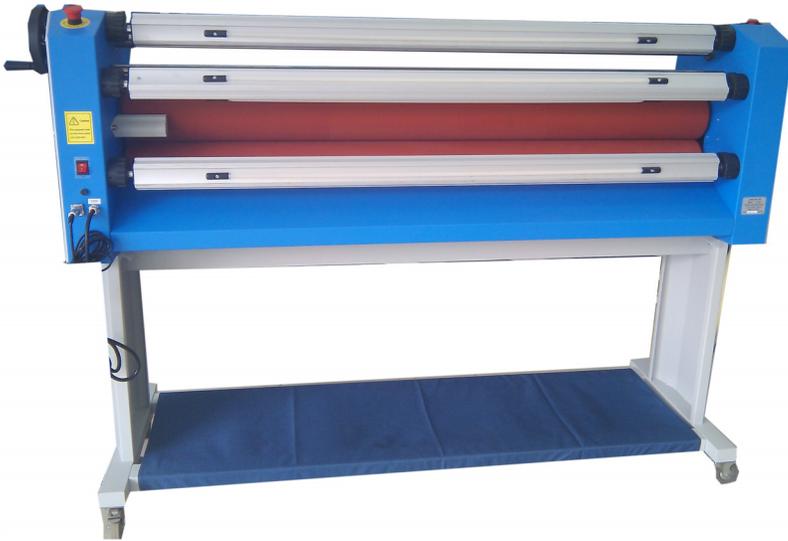

Integrated rear rewind for roll-to-roll applications



Aluminum Quick-grip shafts for easy loading and alignment

Applications

*Signs
Banners
Trade show displays
Point-of-purchase displays
Dry-erase boards
Floor graphics
Graphic mounting
Photo mounting
Window graphics
Vehicle graphics*

Specifications

	355TH	363TH
Laminating Width	55"	63"
Roller diameter	5"	5"
Roller gap	1"	1"
Rear rewind	Included	Included
Max temperature	122° F	122° F
Laminating speed	20 ft/min	20 ft/min
Unwinds	Top/Bottom	Top/Bottom
Liner rewind	Chain drive	Chain drive
Pressure adjustment	Hand wheel	Hand wheel
Tension adjustment	Single knob	Single knob
Heat method	Metal Alloy	Metal Alloy
Max. Roll diameter	6" OD	6" OD
Power supply	120v 12a	120v 13a
Power consumption	1200 W	1400 W
Foot pedal	Included	Included
Stand with casters	Included	Included
Net weight w/ stand	321 lbs	376 lbs
Dimensions	72" x 23.5" x 48.5"	80" x 23" x 48"
Shipping weight machine	436 lbs	507 lbs
Shipping dim. machine	79" x 26" x 31"	87" x 26" x 31"
Safety agency approval	cTUVus	cTUVus



The Profitable Source for Finishing Products